


**Dimensions (mm):** 600x130x110  
**Weight (g):** 580 (+/- 3%)  
**Color:** black  
**Skład:** 100% polypropylene  
**Packaging:** 24 pieces per cardboard  
**Quantity per pallet:** 14 cardboards = 336 pieces  
**Loaded pallet weight (kg):** 215  
**Loaded pallet size (cm):** 120x80x180




## Application

To the protection the edges of various goods, to prevent against the crashes and different damages which can step out while fixing goods on the vehicle by the lashing straps. Also, to protection the lashing straps subject cutting during transportation various goods with sharp edges, i.e. steel sheets or plates.  
 A corner protector designed to the protection of loads on the larger length. This product can be applied to the protection of bricks, tiles on palettes, barrels, products in bags (i.e. cement, glues, gypsum, as well as fertilizers and chemicals).

## Characteristics

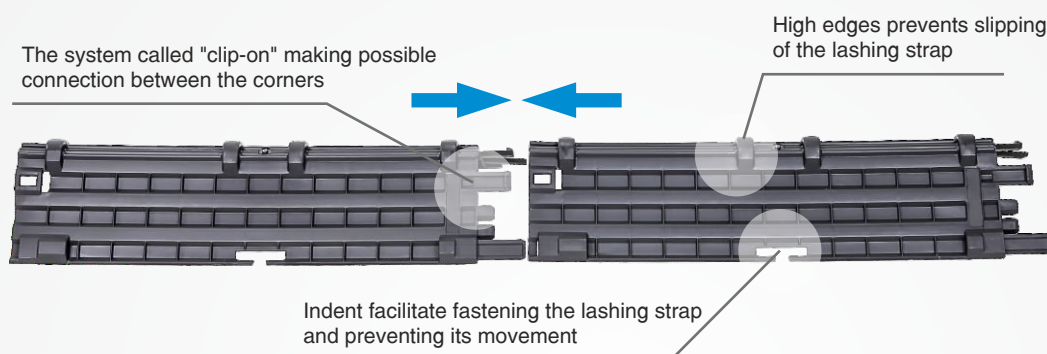

## Technical drawing - corner protector size 600 x 130 x 110

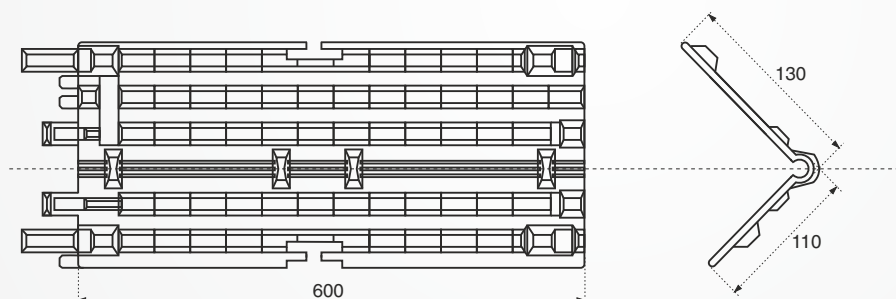

## Additional advantages

Strong and flexible construction  
 Resistant on cracks and fractures in the wide range of temperatures: from -20°C to +70°C  
 Thanks to designed system called: „Clip-on” you can easy adjust the length of corner protector to longer sections (multiple of 600mm) according to the end user needs.  
 Can be combined and separated repeatedly many times, so after unloading the cargo and separating corner protectors one from each other they can be stored for example in the toolbox.

## Environmental Protection

The substance is not biodegradable in the environment, user cannot allow the substance to escape to the environment. Recycling in 100% is possible, product can be reproduced back into the form of granulate and reused in the other production process. The end user is entirely responsible for deciding about the suitability of the product to the specified purposes. The end user is also responsible for the recycling or if necessary the utilization in proper manner.

## Quality

The main role of the corner protector is spread and uniform the distribution of tension over the entire length of the lashing straps. The efficiency in spreading the tension by the corner protector is described as the "K" factor, according to VDI 2700 and the requirements of the directive (norm) DIN EN 12195-1.