Stabilo® profile belt protector

Ref.	Lenght [mm]	Pcs.per pallet
031418N	300	600
061418N	600	300
071418N	750	200
081418N	800	200
101418N	1000	150
121418N	1200	150
241418N	2400	---

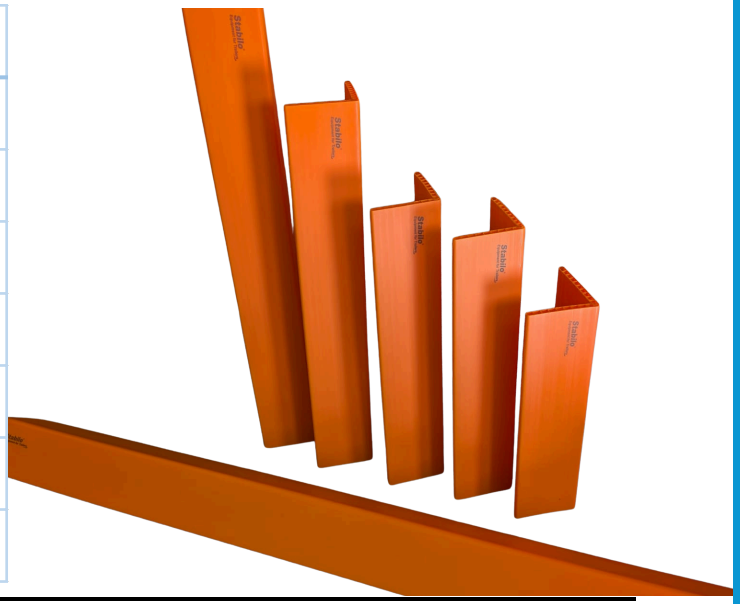

Application

It protects the edges of transported goods, preventing crushing and damage that can occur when securing goods to a vehicle using a lashing strap. It also protects the lashing strap itself against cutting when transporting goods with sharp edges. It allows for securing loads over a greater length and is suitable for palletized transport of bricks, roof tiles, barrels, and bagged products such as cement, glue, plaster, fertilizers, and other bulk goods.

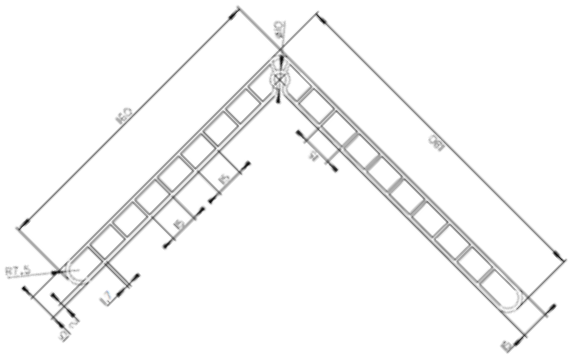

Additional benefits

Resistant and flexible construction. Resistant to impacts and breaks in a wide temperature range: from -20˚C to +70˚C. Thanks to the chamber structure along the entire length, it can be cut into smaller sections depending on the current needs of the user, ranging from 300 to 6000 mm.

Additional benefits

Made of the highest quality materials, high-impact HDPE, meets the EN 13393:2001 standard.